



Installation Guide

2010-15 Ferrari 458

Italia LED Tail lights





ALPHAREX specializes in designing and producing superior and uniquely stylish aftermarket automotive performance lighting with unrivalled innovative technology. This installation guide takes you through the step-by-step process of installing your new **ALPHAREX TAIL LIGHTS** for your 2010-15 Ferrari 458 Italia **DO NOT USE DIELECTRIC GREASE!**

DO NOT USE DIELECTRIC GREASE / REMOVE ANY PRESENT



Contents

PART I REMOVE TAIL LIGHTS

INSTALLATION TOOLS	P1
Step 1: Remove the rear fender liners	P2
Step 2: Remove the tail lights	P5

PART II INSTALL ALPHAREX TAIL LIGHTS


Step 1: Activation light feature	P7
Step 2: Install the tail lights	P8
Step 3: Complete installation	P10

Disclaimer: This installation article is a tutorial guide. By reading this article, you agree it is for reference only and AlphaRex USA and its distributors make no guarantee on the finished results. Under no circumstances whatsoever shall AlphaRex USA nor its distributors be liable for any damage, misuse or personal injuries. If you do not fully understand the installation procedure, it is highly recommended that you seek help from professional mechanics to do the installation.


PART I REMOVE TAIL LIGHTS

INSTALLATION TOOLS

prepare these tools for installation



Metal
Panel
Popper



Power Tool



Plastic
Panel
Popper



1/4 Ratchet



1/4 Extension

10mm



HEX 4mm

T30



Whenever working on your vehicle, always make sure your vehicle is OFF and parked.




Step 1 - Remove The Rear Fender Liners

1.1 - Begin by lifting the rear end of the vehicle and then proceed to remove the rear wheels.




1.2 - After removing the rear wheels, you'll have access to remove the rear fender liners.

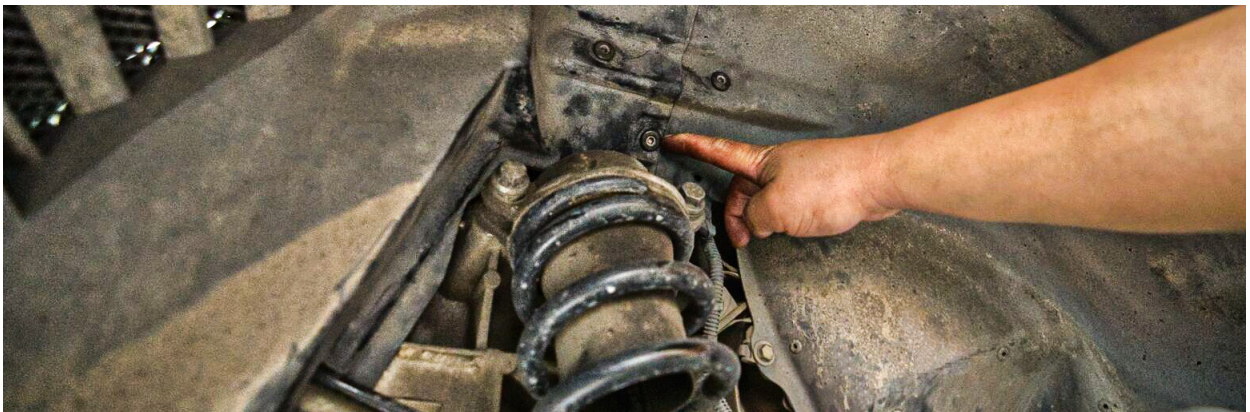

Step 1 - Remove The Rear Fender Liners

1.3 - Use a 4mm hex bit driver to remove the eight nuts securing the rear fender liners on each side of the vehicle.

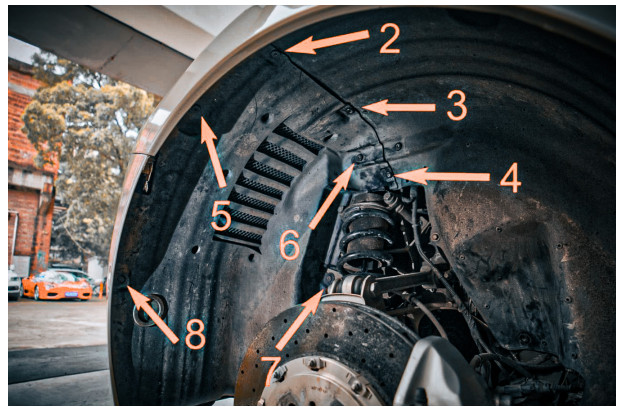


1.4 - Lastly, remove the T30 bolts that secure the rear fender liner from the bottom.



Step 1 - Remove The Rear Fender Liners

1.5 - Remove the rear fender liners and set them aside for later reinstallation.

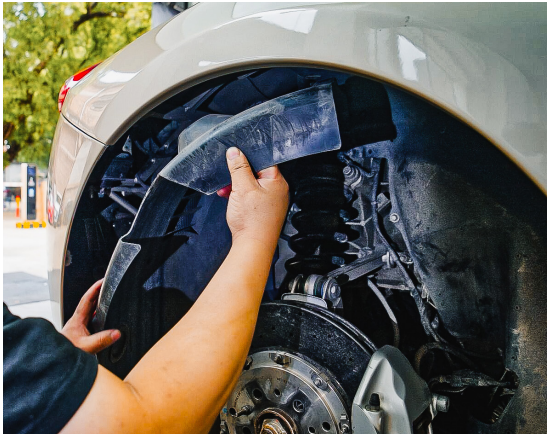


Step 2 - Remove The Tail Lights

2.1 - Unplug the tail light connector from the back of each tail light assembly.




2.2 - Remove the three 10mm nuts securing the tail light assembly.

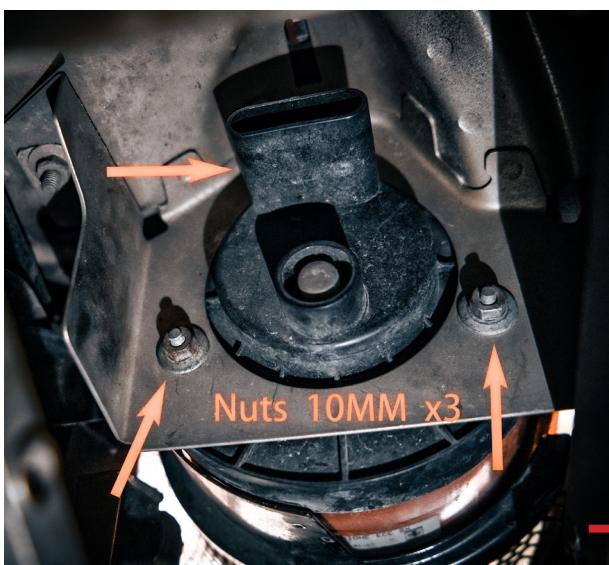

Step 2 - Remove The Tail Lights

2.3 - After removing the tail light assembly, ensure you have the nuts and washers set aside for later reinstallation.


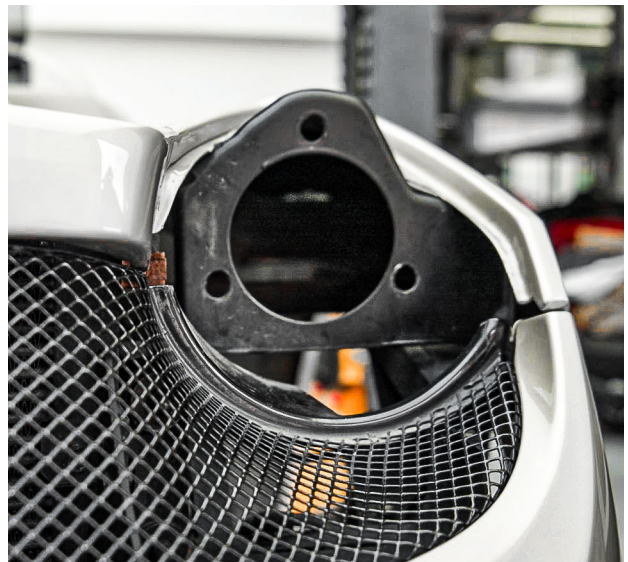


PART II INSTALL ALPHAREX TAIL LIGHTS





Step 1 - Activation Light Feature

1.1 - From the factory, the new ALPHAREX tail lights may come with the Green connector plugged in. If it is connected, this means the activation light feature and sequential turn signal are not enabled. To activate these features, unplug the Green connector.

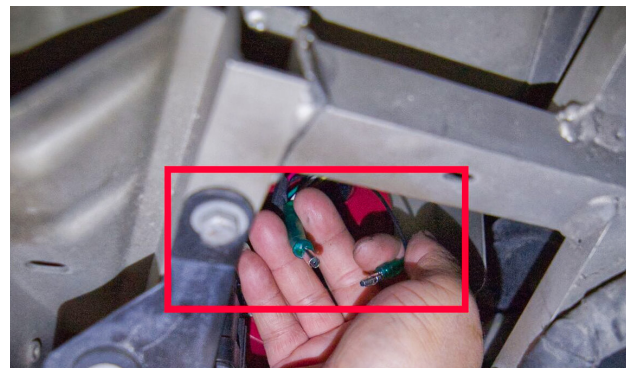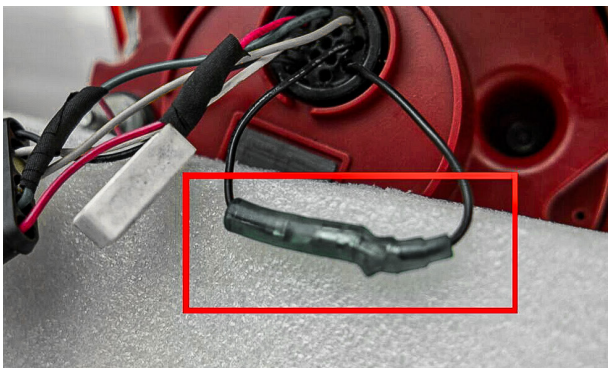



Step 2 - Install The Tail Lights

2.1 - Secure the tail lights into the vehicle by tightening the three 10mm bolts, and make sure to plug in the tail light connector. Follow the same steps for the other side of the tail light.

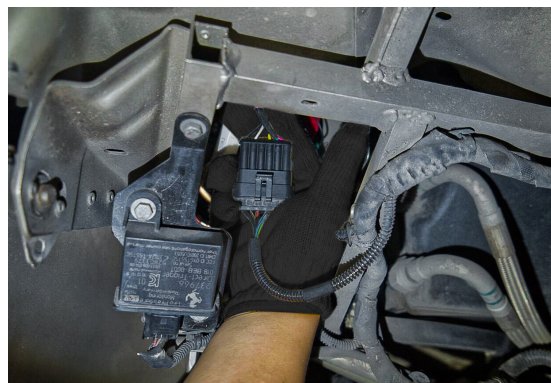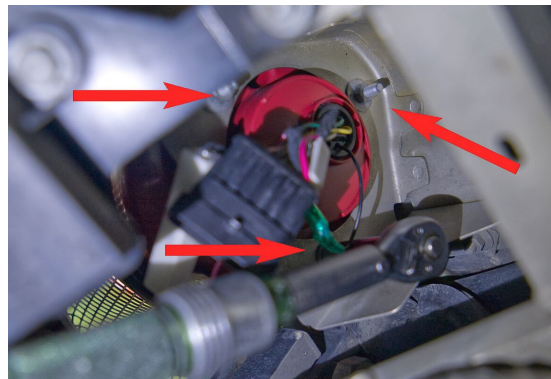

Step 2 - Install The Tail Lights

2.2 - To complete the installation, reverse the removal process.

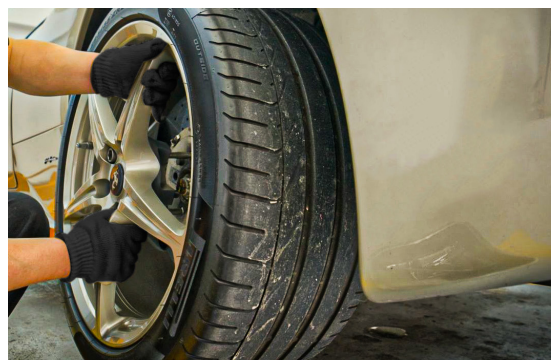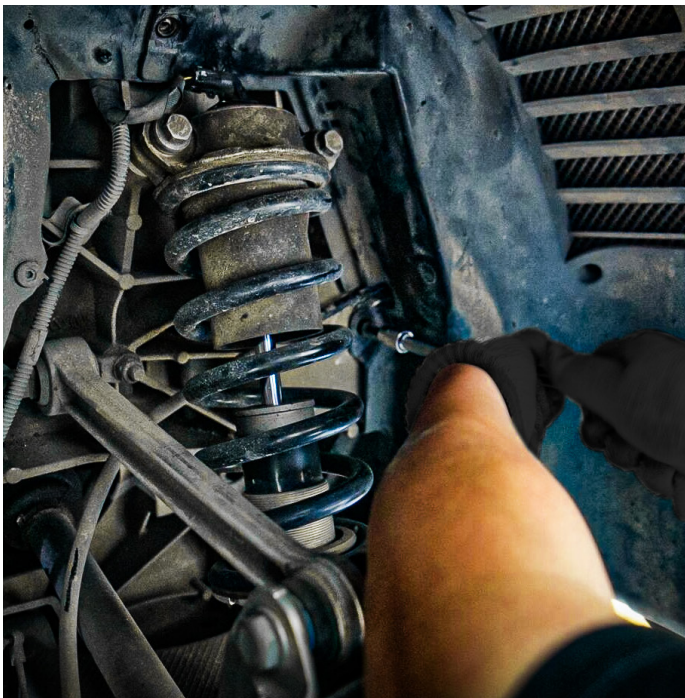

Step 3 - Complete Installation

3.1 - Congratulations! You have completed the installation for ALPHAREX 2010-15 Ferrari 458 Italia LED TAIL LIGHTS.

